



TRN 50 / TRN 50 Silver

Technical data sheet

High tack PE-laminated synthetic cloth tape

Characteristics:

- Excellent adhesion to PE
- Good abrasion resistance
- Easy unwind and tear
- Water resistance finish
- Conformable to awkward shapes
- Non-corrosion adhesive
- Color: silver, black, white

Construction:


Backing: PE laminated synthetic cloth

Adhesive: Synthetic rubber / resins clear adhesive

Storage:

At a dry covered place and at a temperature between +15°C and +25°C.

Tapes stored below the minimum recommended temperature will require warming up to that level before use.

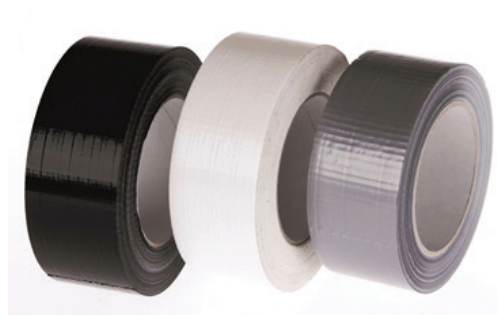

Technical data:			
Property	Norm	unit	Value
Total Weight	ISO 536	g/m ²	153
Total Thickness	AFERA 5006	µm	165
Tensile strength	AFERA 5004	N/cm	34
Elongation at break	AFERA 5004	%	20
Adhesion to steel plate	AFERA 5001	N/cm	11,5
Vapor Transmission Rate		g/m ² x 24h	25
Temperatur range		°C	-10 to +60
Service Temperatur		°C	-10 to +60

Our products are the result of fundamental research. They correspond to the latest technical standard. For their useful application we give data and technical information to the best of our knowledge but, however, without any warranty. In special cases the user shall make his own tests to determine the suitability of the products for his purpose.